

NEW PRODUCTS

August 2021



Switches



Transceivers



Mesh Wi-Fi
System



Routers



M2M



IP Surveillance



Adapters



USB

The D-Link logo, featuring the brand name in a bold, white, sans-serif font with a registered trademark symbol.

D-Link®


License for the DXS-3610 Series

DXS-3610-54S-SE-LIC

Upgradable license from Standard Image (SI) to Enhanced Image (EI) for DXS-3610-54S


DXS-3610-54T-SE-LIC

Upgradable license from Standard Image (SI) to Enhanced Image (EI) for DXS-3610-54T

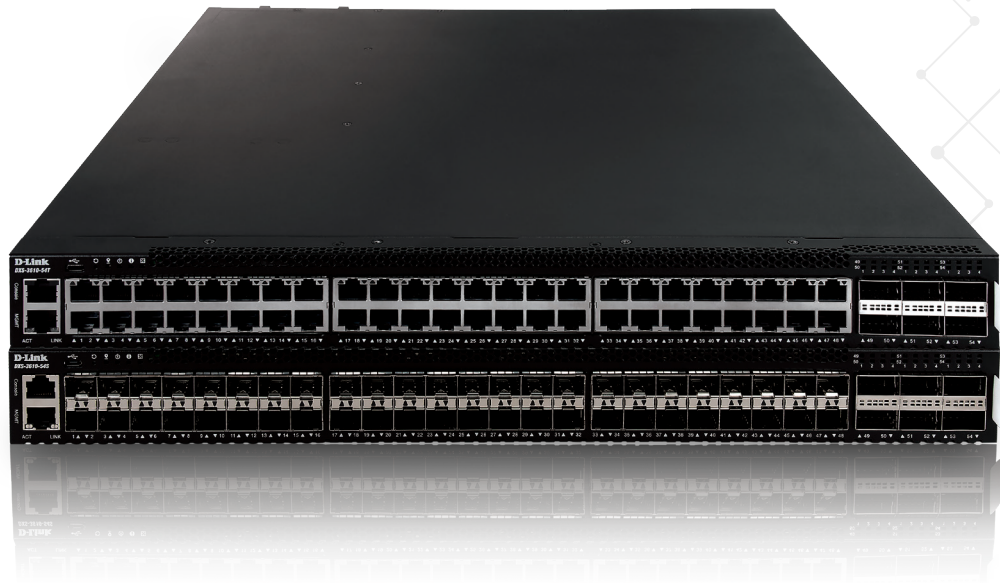

Layer 3 Stackable Managed Gigabit Switch with 10G SFP+ Uplink ports

DGS-3130-30TS/B

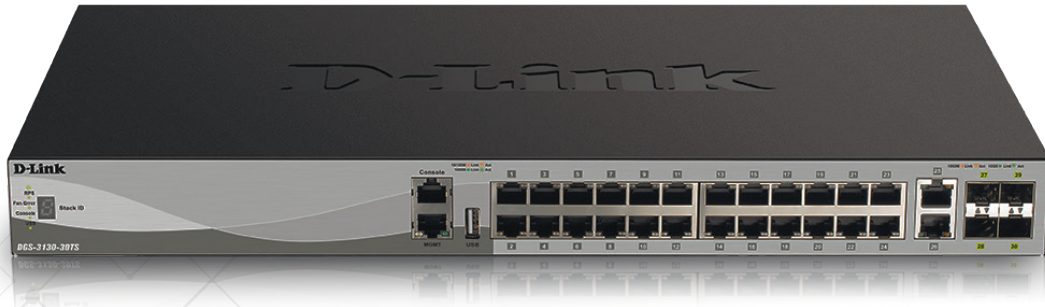


24 x 10/100/1000Base-T ports
2 x 10GBase-T ports
4 x 10GBase-X SFP+ ports

- Expand capacity in a flash with physical stacking up to 9 units
80 Gbps per device physical stacking bandwidth
- 6 kV surge protection on Ethernet ports
- Powerful L2 and L3 features such as Static Route, RIP/RIPng and OSPFv2/v3, IP Interface, ARP Proxy
- IGMP/MLD Snooping, Fast Leave, Voice VLAN
- Advanced security features
- Easy management through Web-based GUI, Full CLI

Gigabit Smart Managed Switch

DGS-1100-05PDV2

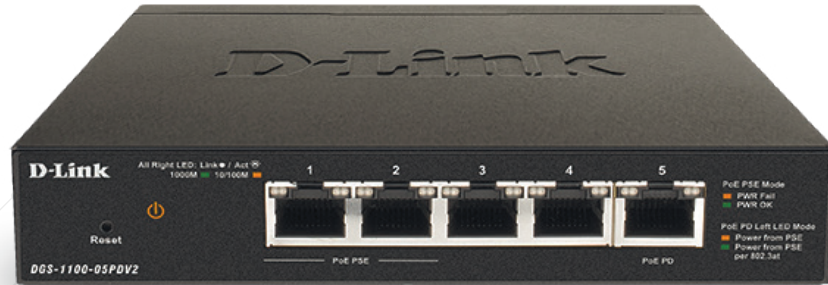

2 x 10/100/1000Base-T ports
2 x 10/100/1000Base-T PoE ports
PoE Budget: 18 W (802.3at) / 8 W (802.3af)
1 x PD Port

- Powerful and flexible networking solution for small, medium, and enterprise businesses
- Layer 2 features: VLANs, STP, Link Aggregation
- Advanced security features: IGMP Snooping, Static MAC, and Storm Control
- Easy troubleshooting: Loopback Detection and Cable Diagnostics
- Innovative D-Link Green energy saving features
- Easy to use Web GUI to access management features
- Fanless design for silent operation

Industrial Gigabit Unmanaged Switch

with wide operating temperature range: -40 to 75 °C

DIS-100G-8W



8 x 10/100/1000Base-T ports

- The metal housing (IP30) to keep network protected and reliably rugged
- Snap-to-DIN-rail clip, wall mounting support
- High EMC endurance
- 2 kV surge protection on Ethernet ports
- Dual power input for redundant power supplies
- Fanless Design for noise-free operation
- Unmanaged plug-and-play simplicity

18-Port Fast Ethernet PoE Switch with up to 250 metres long-range PoE support




16 x 10/100Base-TX PoE Ports
2 x 1000Base-T/SFP combo ports

DES-1018MPV2

- Connects up to 16 PoE devices
- Delivers an impressive PoE power budget of up to 247W and 30W per port
- 2 Gigabit combo ports for unrestricted high-speed uplinks
- Ports 1 to 8 support 250 m PoE distance in Extended mode
- Ports 1 to 16 are isolated from each other in Isolation mode
- 19" rack mountable installation
- Plug-and-play installation and auto-MDI/MDIX crossover

Unmanaged PoE Surveillance Switch

with up to 250 metres long-range PoE support

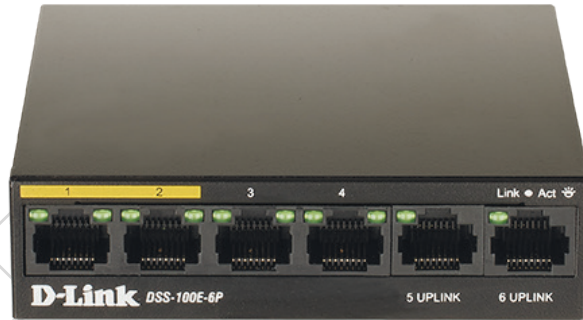

4 x 10/100Base-TX PoE ports
2 x 10/100Base-TX ports

DSS-100E-6P

- Connects up to 4 PoE devices
- 55W power budget with up to 30W per port
- Ports 1 to 4 support 250 m PoE distance and isolated from each other in Extend & Isolate mode
- Ports 1 to 2 support port priority in Standard mode
- 6 kV surge protection on PoE ports
- Fanless design
- Plug-and-play installation


25G SFP28 Transceivers

DEM-S2810LR



25GBASE-LR port
Single-mode (10 km)

DEM-S2801SR



25GBASE-SR port
Multi-mode OM4 (100 m)/ OM3 (70 m)

- Reliable 25 Gbps data transmission
- Compliant with IEEE 802.3by, 802.3cc, and MSA standards
- Hot Pluggable for quick installation

10G SFP+ WDM Transceivers

DEM-436XT-BXD DEM-436XT-BXU



10GBase-BX-D port



10GBase-BX-U port

- Reliable 10 Gbps data transmission
- Single-mode, 40 km / 20 km
- WDM transceivers work in pairs

1G SFP WDM Transceivers

DEM-330T/10KM DEM-330R/10KM



10GBase-BX-D port



10GBase-BX-U port

- Reliable 1 Gbps data transmission
- Single-mode, 10 km
- WDM transceivers work in pairs

AC1200 Dual Band Whole Home Mesh Wi-Fi System



1 x WAN 1000Base-T port
1 x LAN 1000Base-T port

COVR-1102

- 300 + 867 Mbps Dual-Band Wi-Fi
- Industry Standard Wi-Fi CERTIFIED EasyMesh™ for more flexibility
- Smart Roaming
- Profile-based Parental Control for setting boundaries online
- Gigabit LAN/WAN ports
- 2 COVR points cover up to 325 sqm with high-speed Wi-Fi
- Add COVR-1100 units to expand your mesh Wi-Fi network
- Super simple set-up with the D-Link Wi-Fi App

Wireless AC1200 Dual Band Gigabit Router

with MU-MIMO, VPN, WPA3

DIR-842/R4

DIR-842/S1



- For Internet plans up to 1Gbps
- 300 + 867 Mbps Dual-Band Wi-Fi
- MU-MIMO 2 x 2
- Guest Wi-Fi
- Supports WPA3 - the latest Wi-Fi security for more protection
- PPTP/L2TP/IPsec tunnels
- TX Beamforming, Smart adjustment of Wi-Fi clients
- Web filtering, ad blocking function, parental control
- D-Link Assistant mobile app for configuration and management




DIR-842/R4




DIR-842/S1

Processor



1 GHz



1 GHz

RAM

128 MB, DDR2

128 MB, DDR2

Flash

128 MB, SPI

128 MB, SPI NAND

Ports Configuration



Antennas

4 x 5 dBi

4 x 3,5 dBi

4G LTE Wireless M2M Router

with 4G LTE and Wi-Fi



1 x 10/100Base-TX WAN/LAN port

1 x 10/100Base-TX LAN port

2 slots for SIM card

Terminal block with DI-1, DI-2, DO, Rx, Tx, GND pins

DWM-312W

- Built-in 4G LTE modem (up to 150 Mbps)
- 3 detachable antennas (2 LTE, 1 Wi-Fi)
- IPSec/GRE/EoGRE/PPTP/L2TP tunnels
- PPTP/L2TP servers
- Plug-and-play with Ethernet interface
- TR-069 CPE WAN Management Protocol
- Tolerates a wide range of operating temperatures and humidity
- D-Link Assistant mobile app for configuration and management

H.265 4-Megapixel Outdoor Bullet & Dome Cameras

DCS-4714E

DCS-4614EK


- 1/2.8" 4-megapixel progressive CMOS sensor captures high-quality footage
- Resolution of up to 2592 x 1520 at 30 fps
- Angles of view: 100° (H), 58° (V), 126° (D)
- Adjustment angle for DCS-4614EK: 350° (tilt), 335° (rotate)
- WDR, Built-in 30 m IR LED illuminator
- ONVIF Profile S compliant
- Works in a wide range of climates from -40°C to 50°C
- IP66 certified housing
- IK10 vandal-proof housing (DCS-4614EK)



1 x 10/100Base-TX PoE port
microSD card slot

AX1800 Wi-Fi 6 USB Adapter


with USB 3.0, MU-MIMO, WPA3 support

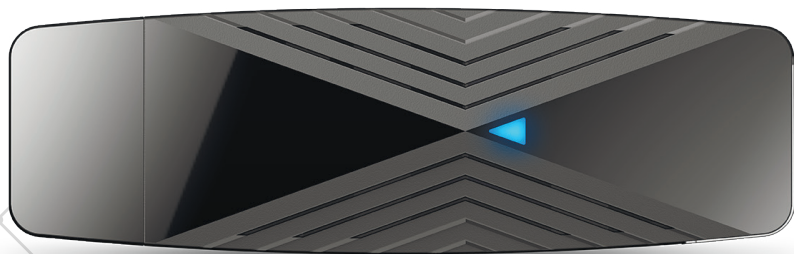

DWA-X1850

- AX1800 speeds up to 600 Mbps (2.4 GHz) & 1200 Mbps (5 GHz)
- OFDMA and MU-MIMO technologies ensure a fast and efficient Wi-Fi connection
- Supports the latest WPA3™ Encryption for more protection

PCI Express Network Adapter

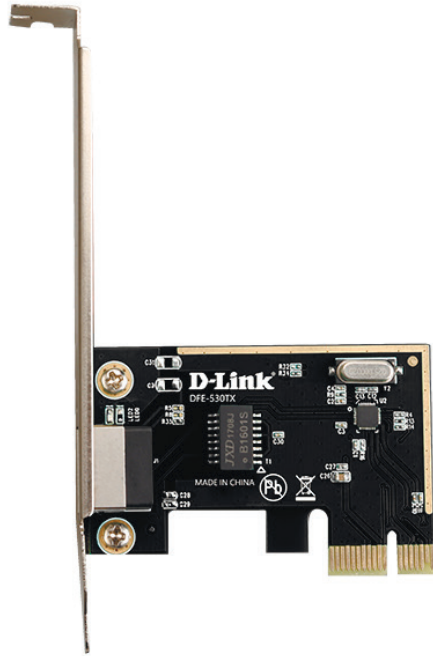

1 x 10/100Base-TX port

DFE-530TX/E

- Transmitting data at 200 Mbps full-duplex
- Wake-on-LAN function
- PCI Express x1

USB Smart Card Reader



DCR-100

- Supported cards:
ATM/CAC/ID/IC/SIS/credit cards
- Smart card Interface speeds up to 420 Kbps
- Supported Operating Systems: Windows XP/Vista/7/8/8.1/10,
Mac OS 10.4, Linux Redhat 9, Ubuntu 8.04, Fedora Core 9+